




HYBRID BRACKETS

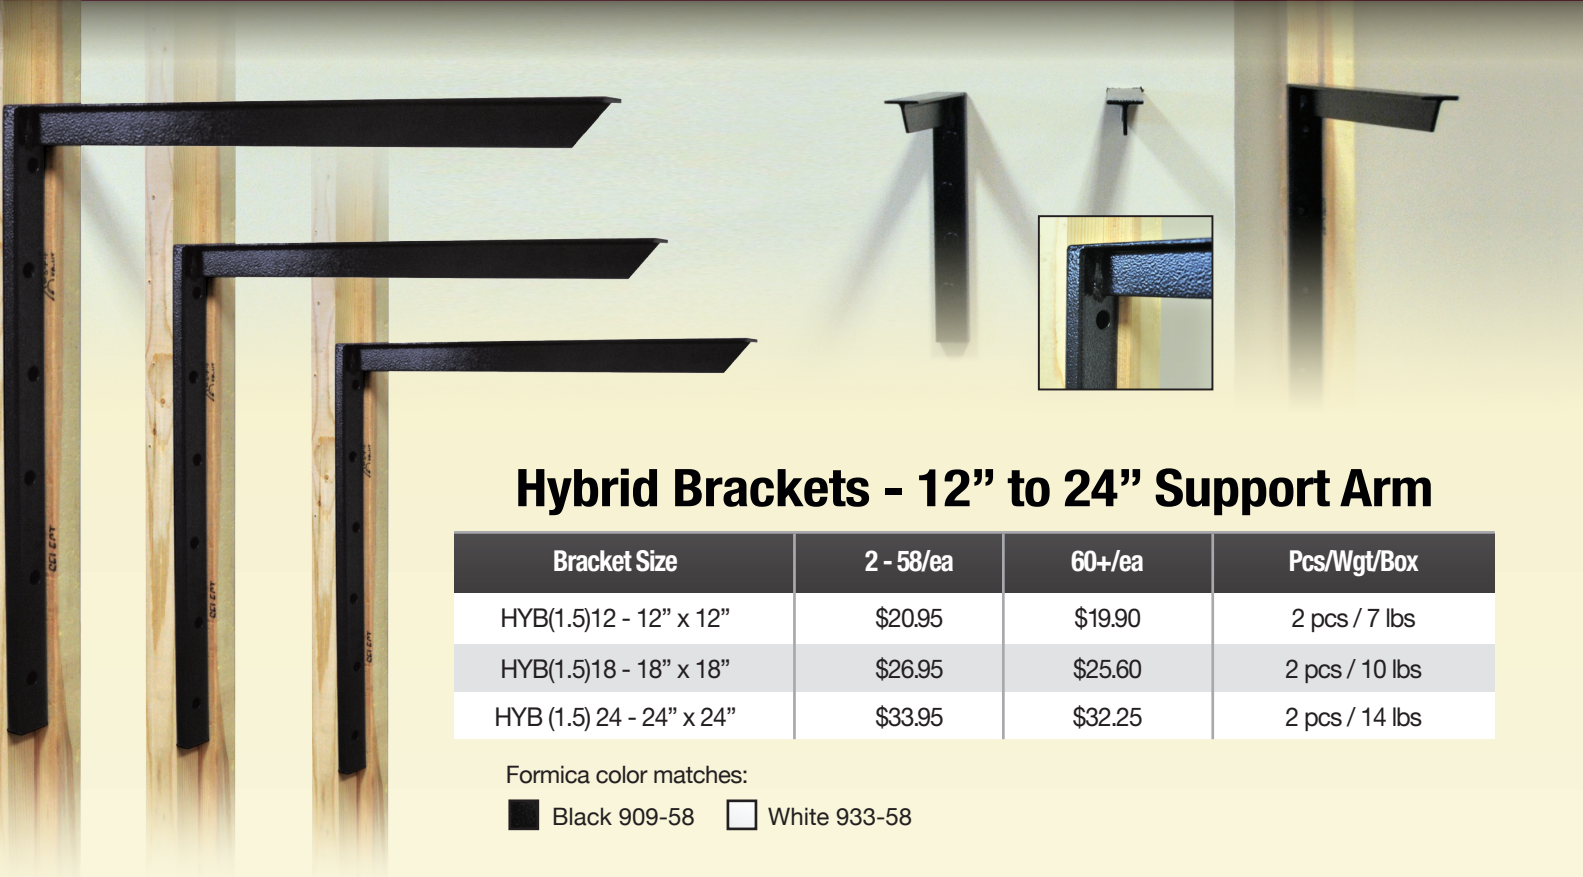

Hybrid Brackets - 12" to 24" Support Arm

Bracket Size	2 - 58/ea	60+/ea	Pcs/Wgt/Box
HYB(1.5)12 - 12" x 12"	\$20.95	\$19.90	2 pcs / 7 lbs
HYB(1.5)18 - 18" x 18"	\$26.95	\$25.60	2 pcs / 10 lbs
HYB (1.5) 24 - 24" x 24"	\$33.95	\$32.25	2 pcs / 14 lbs

Formica color matches:

- Black 909-58
- White 933-58

HYBRID BRACKET (SURFACE MOUNT OR CONCEALED/FLOATING)

Our Hybrid Bracket can be installed as either a Surface Mount or Concealed (floating) Bracket. Concealed Installation is done by ripping a 2x4 and mounting it to the stud. The bracket is then mounted to the recessed, ripped 2x4. Install the drywall over the 1.5 inch T. This bracket has a tubular vertical arm (1.5 inches by .75 inches) and a 1.5 inch horizontal T.

- Available with 12", 18" and 24" support arms
- Load limit range of 1,050 lbs. to 2,200 lbs. per pair
- Available in Black or White krinkle powder coat
- All sizes packaged 2 pcs per box
- Hardware not included

TEST RESULTS - TABLE 2: The result of ultimate load testing of submitted shelf brackets

"HBY" Specimen Number	Bracket Dimensions	Ultimate Load (lbf)
1	HYB(1.5)12 - 12" x 12"	2200 lbs/pair
2	HYB(1.5)18 - 18" x 18"	1300 lbs/pair
3	HYB(1.5)24 - 24" x 24"	1050 lbs/pair

A&M HARDWARE, INC.

Call To Order (888) 647-0200

2705 Mount Joy Road, Manheim, PA 17545 | Fax: (717) 653-5874

www.AandMhardware.com